


MICROCOM 385M Thermal Kiosk Printer

Compact. Powerful.
Built for Performance.

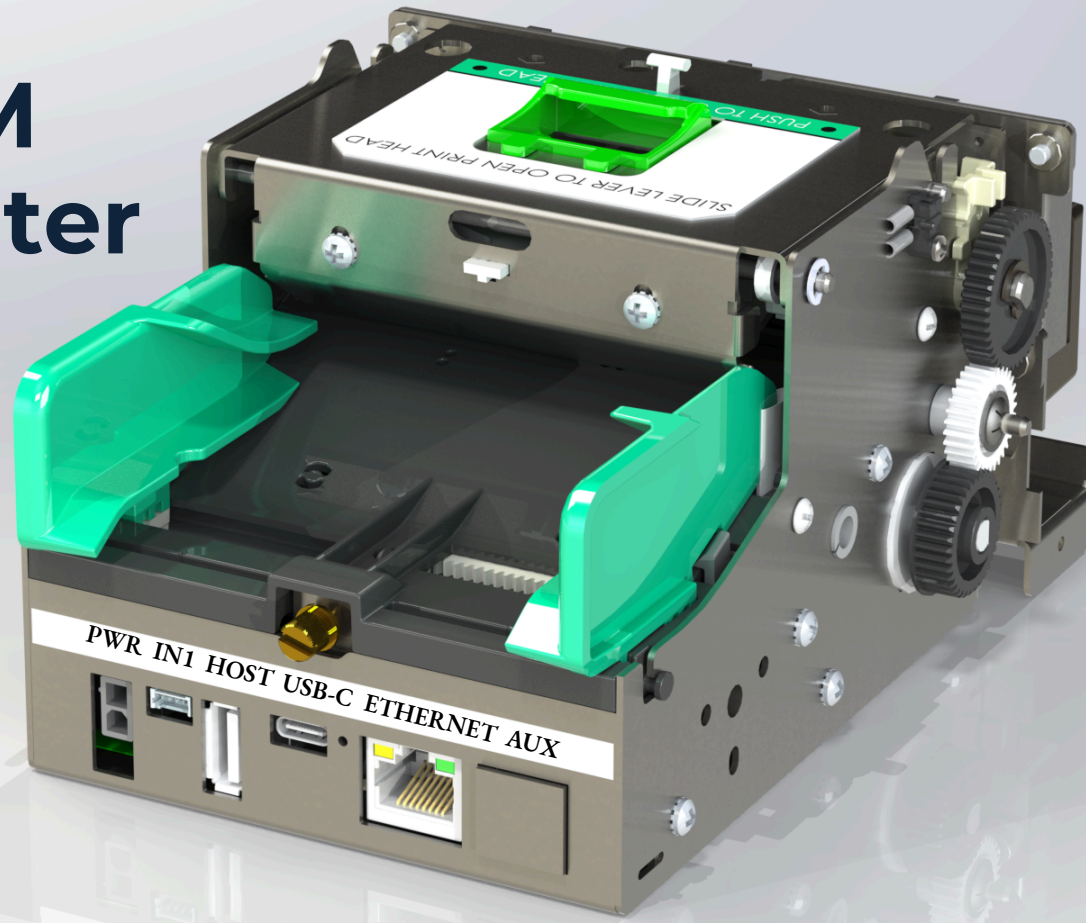

PHYSICAL DIMENSIONS

Height	Width	Depth
3.5"	5.2"	6.6"

H × W × D: 88.9 × 132.1 × 167.6 mm

WEIGHT

2.5 lbs to 4 lbs
(depending on the configuration)

KEY FEATURES

- 100% Duty Cycle Printing – Built for continuous operation
- Guillotine Cutter
- USB-C, Ethernet Connectivity (optional WIFI, Bluetooth)
- Adjustable Black Line Sensor
- Automatic Paper Load
- Field Replaceable Wear Parts

SOFTWARE INTEGRATION

- Microsoft® Windows® Driver
- Emulation: FGL
- LDS2 Language
- Linux CUPS Driver
- Android SDK

CAPABILITIES

- Downloadable, Scalable Fonts
- Expandable in Height and Width
- 0, 90, 180, and 270 Degree Rotation


COMPLIANCE & WARRANTY

- RoHS Compliant
- FCC
- One-Year Limited Warranty
- UL Recognized Component

OPTIONS/ACCESSORIES



- NFC and (pending) UHF RFID Option
- Pinch Holder Option
- Roll Holder (6" to 8" OD) Option

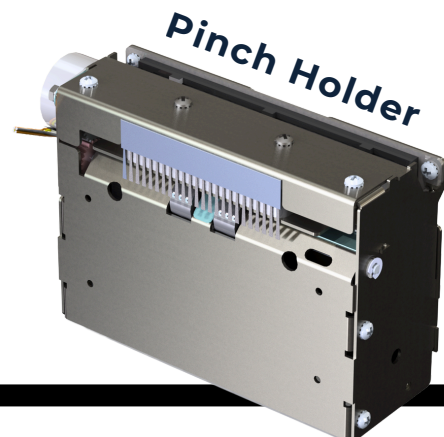

PERFORMANCE SPECIFICATIONS

- Resolution: 300 dpi
- Print Speed: Up to 8" per second
- Media Compatibility: Roll or continuous media; black sense mark, die-cut, blow-hole, continuous
- Paper Width: .75" – 3.25" (19.1mm - 82.6mm)
- Paper Thickness: Up to 0.007"

IDEAL APPLICATIONS

Live Event & Box Office Ticketing
Parking & Transportation Passes
Admissions, Vouchers, Labels, and Tag
Printing

ASSORTED BARCODES

Code 39, Codabar, Interleaved 2 of 5, EAN13, EAN8, UPC, Code 128, PDF-417, GS1 DataMatrix (ECC 200), QR, Aztec, and more

ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature: 40°F to 104°F (5°C to 40°C)
- Relative Humidity: 10–85% Non-Condensing
- Power Supply: Auto-Sensing, 100-240 VAC, 50–60 Hz, 2.8 Amps



MICROCOM CORPORATION
855 Corduroy Rd.
Lewis Center, OH 43035

(740) 548-6262
microcomcorp.com
830045-0000